



Panasonic
ideas for life



Unmatched reliability & superior image quality – the LRH30 Series HD LCD is your best value for patient room use

Upgrade your patients' in-room entertainment experience with the LRH30 Series Healthcare Grade LCD HDTV. UL 60065 Annex Q certified for patient room use, the 32-inch display is engineered for long life. With an extremely low failure rate of less than .5%*, the LRH30 professional display delivers rugged reliability and a high ROI. Providing patient room LCDs with the industry's best image quality at an incredible value is just another way Panasonic is engineering a better world.

For more information go to:
panasonic.com/healthcare/lrh30
or call: 1.866.770.1808

LRH30U Healthcare Grade Display Advantages

- Long Service Life (extremely low failure rate of less than 0.5%*)
- UL 60065 Annex Q certified for patient room use
- Universal pillow speaker interface — provides easy integration with existing in-room patient entertainment systems.
- Pro:Idiom® compatibility
- SD card slot allows for system wide cloning from a single location
- Integrated *b*-LAN supporting LodgeNet HD Video on Demand (other VOD providers supported via MTI)
- Energy efficient operation (ENERGY STAR 5.3 and CEC compliant)
- Panasonic Concierge Service Program provides on-site technical maintenance and support



*Based on Panasonic Service records of similar type products.

Designed to Meet Healthcare Facility Needs

The LRH30 Series TH-32LRH30U is a Professional Healthcare-Grade 32-inch LCD HDTV built for patient room, lobby and waiting room use in hospitals, medical care centers, nursing homes and other healthcare facilities in accordance with UL 60065 Annex Q Safety Requirements. Features include space-saving design, built-in tri-band tuners, hidden speakers and energy-saving efficiency, along with Panasonic's reputation for high production quality and low maintenance and repair rates.

Professional Features for Healthcare

Weighing just 21lbs. with a depth of 3.3 inches, TH-32LRH30U is easily wall mounted and provides patients and visitors with a flat screen, high definition viewing experience. The display's SD card slot allows viewing of digital camera images saved on SD Memory Cards, so visitors and medical personnel can easily share pictures.



Fully Compatible with Pillow Speaker

A 1/8-inch M3 terminal jack for a pillow speaker is located on the connector panel. The TH-32LRH30U is compatible with virtually any pillow speaker on the market.

"All major IT investments come with their share of risks and purchasing displays for our facility was no different. We needed a device that minimized risks by delivering quality, functionality and value. Failure to achieve these objectives would result in a quality of life issue for our residents and negative financial impact for the company. With its excellent picture quality, competitive price and UL Annex Q certification, the Panasonic LRH display series definitely meets our needs."

Steve Galper
Owner
Berkley East Convalescent Hospital

Download "Digital Concierge" Whitepaper


panasonic.com/healthcare/digital_concierge

TH-32LRH30U Specifications

| | |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Screen Size | 31.5-inch |
| Aspect Ratio | 16:9 |
| Panel | LCD CCFL |
| Number of Pixels (HxV) | 1,366 x 768 pixels |
| Brightness | 450 cd/m ² |
| Contrast Ratio | 18,000:1 |
| Viewing Angle | 178 degrees |
| Response Time | 7 ms (G to G) |
| Receiving System | ATSC/QAM/NTSC (MPEG2, MPEG4/H.264 support) |
| Pro:Idiom | Integrated b-LAN |
| Cloning | Yes (SD) |
| PILLOW SPK IF | Yes (M3) |
| UL Annex | Q Yes |
| Interface | Input - HDMI, Composite, Component, PC-In Control - MTI/Game port (RJ11), RS232C (M3) Other - SD card slot (cloning, image viewer) |
| Bezel Color | Matte Black |
| Speaker | 10 W + 10 W (10% THD) 1 Way 2 Bottom Speaker |
| Power Requirements | 110 - 127 V AC, 60 Hz |
| Power Consumption | TBD (ENERGY STAR 5.3, CEC) |
| On Mode Average Power Consumption | TBD |
| Stand-by Condition | TBD |
| Dimensions | 31.5" x 20.2" x 3.3" |
| Weight | Approx. 21.0 lbs (9.5 kg) |
| Safety Regulations | UL 60065 Annex Q and UL 6500 Ver 2 |
| Radiation Regulations | FCC Part 15 Class-B, ICES-003 |
| Warranty | 3 years |

Tentative - Product design and specifications subject to change without notice.

System Configuration

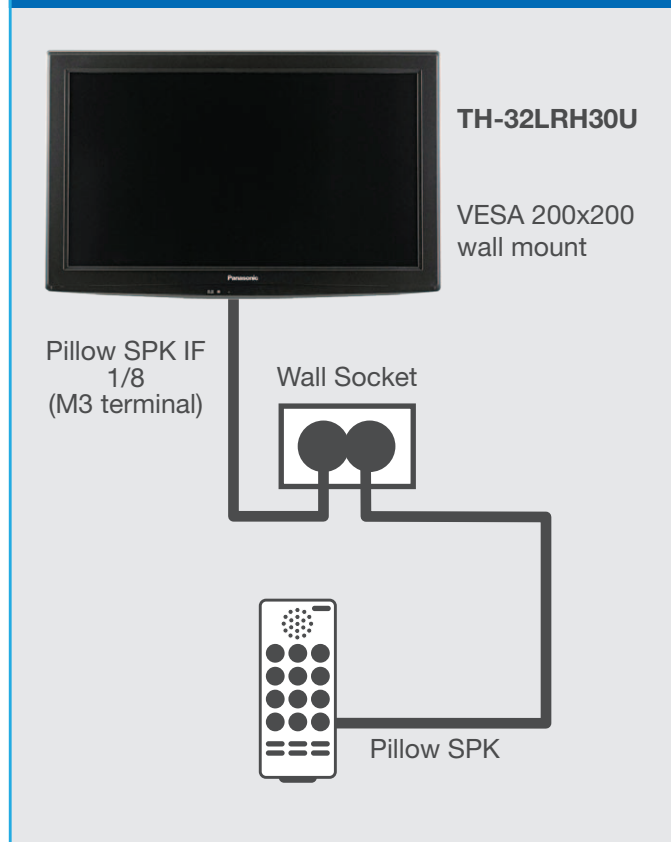

For more information, please call: **1.866.770.1808**
panasonic.com/healthcare/lrh30